

Introduction



"CDL" Aluminum Ceiling Hatch is one kind of brand-new design in the modern decoration design.


It is suitable on the sound-insulated ceiling system. The problem of inspection and maintenance like air-conditioning, electrical, fire prevention system can be solved. It has continuously puzzled the designer, the manufacturer and the contractor.

產品介紹

"CDL" 鋁質明骨石膏板檢收口是現代裝飾設計中一種嶄新的設計。它適用於隔音密閉天花系統上，能夠解決了一直困擾著設計師、製造者及裝修承包商等在密閉天花系統上面進行各樣的檢查及維修問題，如空調、電器、通訊及消防系統等。

"CDL" Aluminum Ceiling Hatch is easily to be installed and simple operations. Using the light-handling portable tools can open the hatch directly.

"CDL" 鋁質明骨石膏板檢收口容易安裝，操作十分簡便，使用輕便的手提工具便可直接打開檢收口。

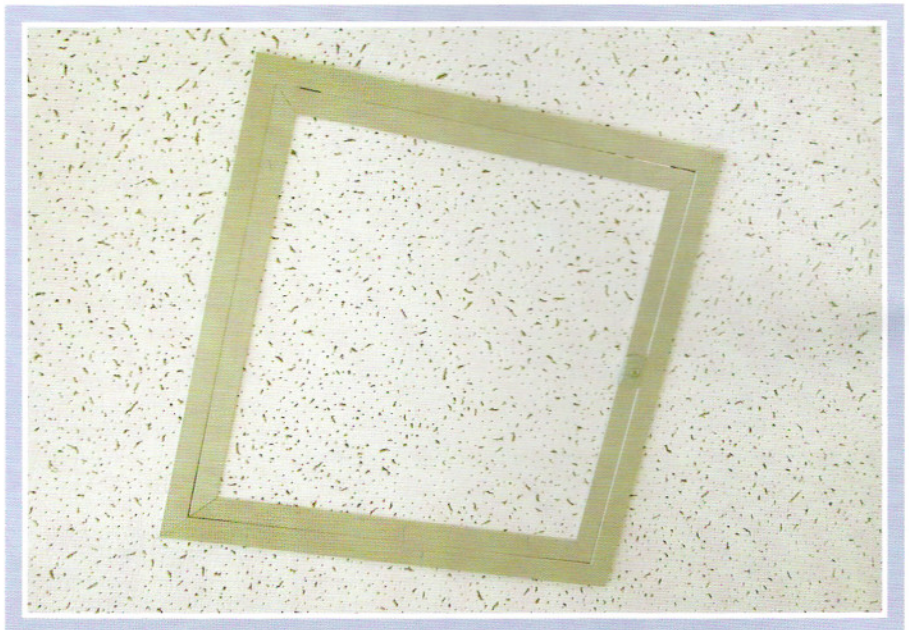

Model No. 型號	Dimension 規格尺寸			
	Size 大小	A 尺寸	B 尺寸	C 尺寸
H-300	300 x 300mm	300mm	263mm	314mm
H-450	450 x 450mm	450mm	413mm	464mm
H-600	600 x 600mm	600mm	563mm	614mm

Special dimension can be ordered according to the enquiry of Designers, Architects and Consultants. 可根據設計師、建築師及建築顧問的需求，可訂造特殊尺寸的檢收口。

Installation Procedure

1. Cut a hole on the gypsum ceiling board with size "A" listed on the table (FIG A).
2. Fix the Ceiling Hatch into the hole by screwing the fixture H-1001 on the U-Channel (FIG B).

1. 按圖(A)所示，首先在石膏板上開一個方孔，該尺寸為 "A x Amm"。
2. 按圖(B)所示，把檢收口套上方孔之內，U槽及夾具H-100配裝使用，把整個檢收口固定在石膏皮之上。

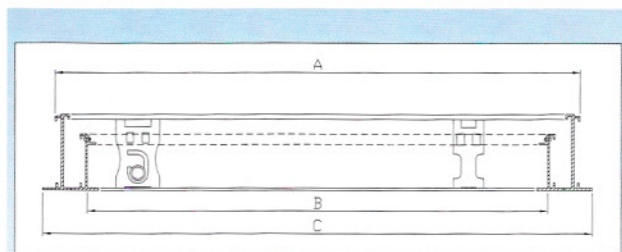


Fig.A
圖A

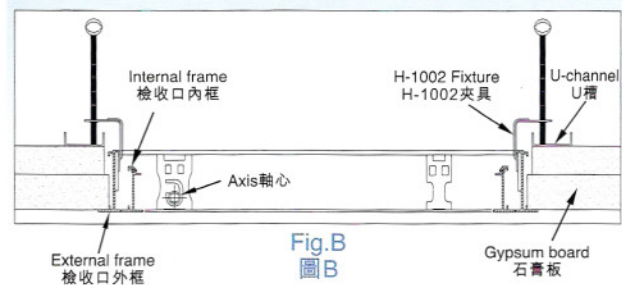


Fig.B
圖B

3. Loosen the internal frame from the Ceiling Hatch (FIG C & D).




Fig.C
圖C

3. 按圖(C及D)所示，直接把檢收口的內框鬆脫出來。

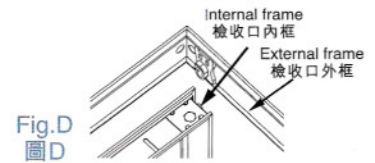


Fig.D
圖D

4. Cut a piece of gypsum board with size "B" and insert it to the internal frame. Hold the gypsum board on the internal frame, use the fixture H-1002 (FIG E & F).

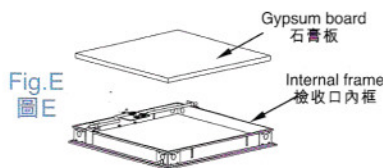


Fig.E
圖E

4. 按圖(E及F)所示，準備一塊石膏板，尺寸為 "B x B mm"，之後把它放在檢收口的內框。然後使用夾具H-1002，把石膏板固定在檢收口的內框。

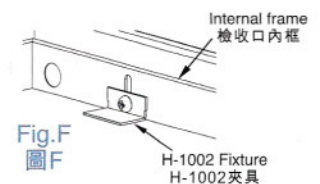


Fig.F
圖F

5. Re-install the internal frame in the Ceiling Hatch and lock it by turning the locker clockwise (FIG G & H).

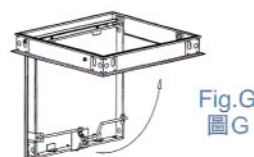


Fig.G
圖G

5. 按圖(G及H)所示，把檢收口的內框重新組裝在檢收口的外框。最後，關閉檢收口及使用螺絲批以順時針的方向把開關鎖緊。

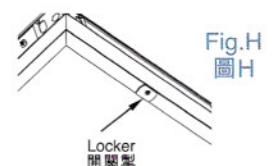


Fig.H
圖H