

Introduction




"KIJI" Concealed Access Panel is one kind of brand-new design in the modern decoration design. It is suitable on the sound-insulated ceiling system. The problem of inspection and maintenance like air-conditioning, electrical, fire prevention system can be solved. It has continuously puzzled the designer, the manufacturer and the contractor.

產品介紹

"KIJI" 暗骨石膏板檢收口是現代裝飾設計中一種嶄新的設計。它適用於隔音密閉天花系統上，能夠解決了一直困擾著設計師、製造者及裝修承包商等在密閉天花系統上面進行各樣的檢查及維修問題，如空調、電器、通訊及消防系統等。

"KIJI" Concealed Access Panel is easily to be installed and simple operations. Using the light-handling portable tools can open the hatch directly. Using with the existing panel, special feature of the access panel like "slim" visual grid makes the overall ceiling more perfect.

"KIJI" 暗骨石膏板檢收口容易安裝，操作十分簡便，使用輕便的手提工具便可直接打開檢收口。檢收口的可見的邊位均十分幼細，配合其他天花使用，令整體天花效果更加完美。

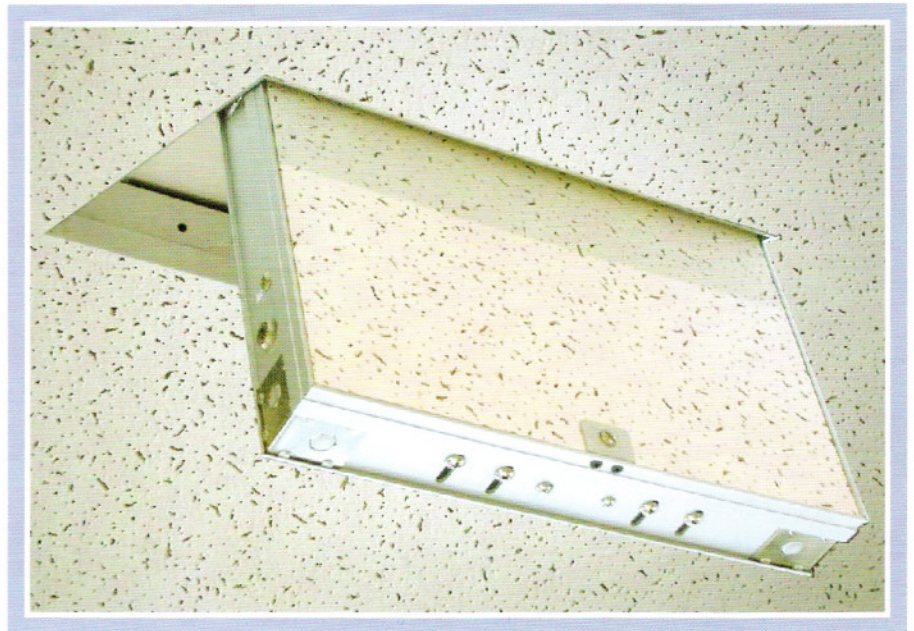

Model No. 型號	Dimension 規格尺寸				
	Size 大小	A 尺寸	B 尺寸	C 尺寸	D 尺寸
KJ-300	300 x 300mm	300mm	288mm	370mm	334mm
KJ-450	450 x 450mm	450mm	438mm	520mm	484mm
KJ-600	600 x 600mm	600mm	588mm	670mm	634mm

Special dimension can be ordered according to the enquiry of Designers, Architects and Consultants.
可根據設計師、建築師及建築顧問的需求，可訂造特殊尺寸的檢收口。

Installation Procedure

1. Cut a hole on the gypsum ceiling board with size "A" listed on the table (FIG A).
 2. Fixe the Ceiling Hatch into the hole by screwing a set of parts including Nonius Hanger (KS-13a), and accessory (KS-13b) and C-channel (FIG B).
1. 按圖(A)所示，首先在石膏板上開一個方孔，該尺寸為 "A x Amm"。
2. 按圖(B)所示，把檢收口套上方孔之內，U槽及夾具H-100配套使用，把整個檢收口固定在石膏皮之上。

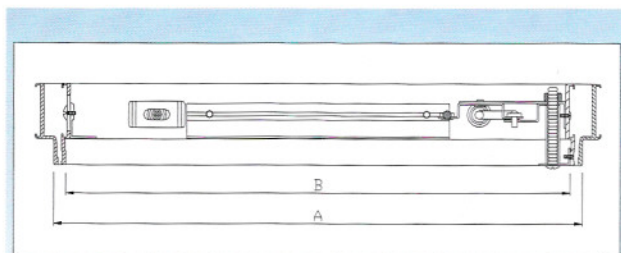


Fig.A
圖A

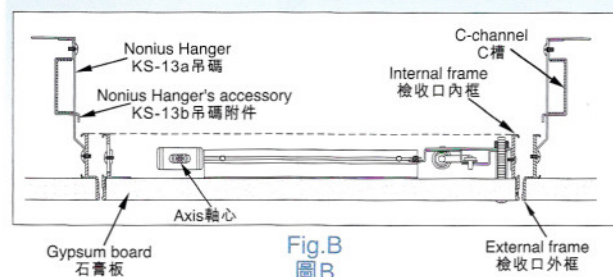


Fig.B
圖B


3. Loosen the internal frame from the Ceiling Hatch (FIG C & D).

Fig.C
圖C



3. 按圖(C及D)所示，直接把檢收口的內框鬆脫出來。

Fig.D
圖D



4. Fasten the nonius hanger (KS-13a) and its accessory (KS-13b) on the external frame and the C-channel (FIG E). Adjust a length of the suspension accordingly and bend the top of the nonius hanger to 90 degree (FIG F).





Fig.E
圖E


4. 按圖(E)所示，先把吊碼(KS-13a)和吊碼附件(KS-13b)分別固定在檢收口外框的C槽上。按圖(F)所示，可根據所需的高度調整吊碼附件的位置，最後把吊碼頂部折成90度。

Fig.F
圖F



5. Install the size "B" of gypsum board in the internal frame. After that re-install the internal frame in the Ceiling Hatch and lock it by turning the locker clockwise (FIG G & H).

Fig.G
圖G



5. 按圖(G)所示，先把一塊尺寸為 "B x B mm" 的石膏板鎖緊在檢收口的內框，再將檢收口的內框重新組裝在外框。按圖(H)所示，關閉檢收口及使用螺絲批以順時針的方向把開關鎖緊。




Fig.H
圖H